



Electrolux

Ice Cuber 42kg/24h with 16kg bin - Air cooled

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



Ice Cuber

42kg/24h with 16kg bin - Air cooled

730525 (FGC42A)

Ice maker, cube, 42 kg/24h,
self-contained, 16kg ice
collection bin included, air -
cooled

Short Form Specification

Item No. _____

Plastic flap on the front, top and sides in 304 AISI stainless steel. The ice-making method (spray layering) guarantees compact, hygienically pure ice cubes that are resistant to melting. The metal sprayers are easy to remove, permit a simple flow and prevent limestone formation. R404a refrigerant. Air cooled. Container capacity Kg: 16

Main Features

- Compliant to CE requirements for safety.
- Fully automatic in operation.
- Operates over a wide range of temperatures.
- Suitable for gravity drain only (no pumps needed).
- Rated output is at an ambient air temperature of 21°C and water supply temperature of 15°C.
- The ice-making method (spray layering) guarantees crystalline, compact, hygienically pure ice cubes that are resistant to melting.
- Model available in air-cooled version.
- Ice cube cone shape with the trunk sides slightly squashed.
- Bin integrated as standard.
- Compact dimensions of the ice cubers make them highly suitable for any location, particularly those where space is at a premium.

Construction

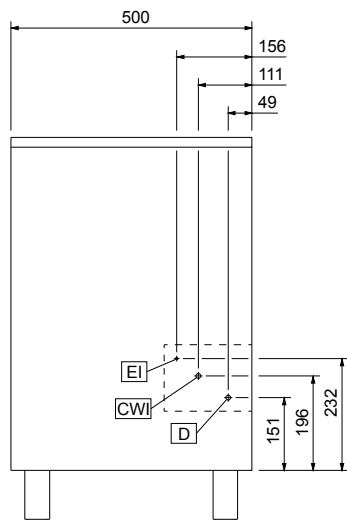
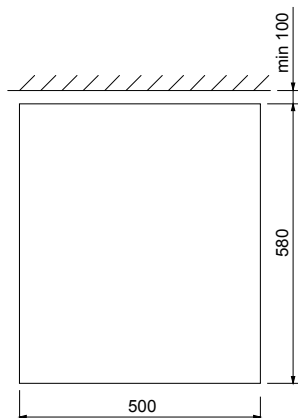
- Plug as standard (schuko type).
- AISI 304 stainless steel exterior.
- Stainless steel spray arms removable without the use of tools.
- The inox sprayers are easy to take away, permit a simple flowing and prevent limestone formation.
- Internal ice cubes container in ABS.
- Adjustable feet 110-150 mm.
- Refrigerant type: R404a.
- Reliability guaranteed by the quality of the construction materials used (plastic flap on the front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.

APPROVAL: _____



Electrolux

Ice Cuber
42kg/24h with 16kg bin - Air cooled

Front

Top

CWI

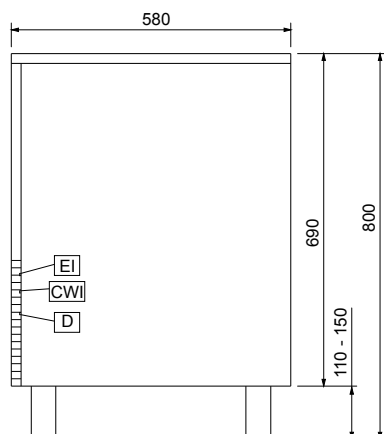
= Cold Water inlet

EI = Electrical connection

D = Drain

EQ = Equipotential screw

ED = Remote electrical connection

Side

Electric
Supply voltage:
730525 (FGC42A)

220/240 V/1N ph/50 Hz

Electrical power:

0.45 kW

Capacity:
Bin capacity:

16 kg

Key Information:
External dimensions, Height: 800 mm

External dimensions, Width: 500 mm

External dimensions, Depth: 580 mm

Net weight: 52 kg

Output: 42 kg/day

Kind of cube: Ice Cube 18 g

Refrigeration Data
Refrigerant type:

R404a