

REFRIGERATOR MANUFACTURER
Turbo air

WARRANTY **2 YEARS**
PARTS & LABOUR

BEST QUALITY PRODUCTS
IN THE WORLD



Call us today on **1300 362 596** or
Visit us at **www.turboairaus.com.au**

MANUFACTURING SITES



TURBO AIR CHINA FACTORY



SKIPIO CHINA FACTORY



TEXAS FACTORY



KOREA FACTORY

MANUFACTURING FACILITIES



R&D OFFICE



AUTOMATIC BENDING MACHINE



CHARGING MACHINE



PERFORMANCE TEST



MACHINERY



FOAMING MACHINE



PRODUCTION LINE



LABORATORY

ABOUT SKIPIO

TURBO AIR, the world's best refrigeration supplier, has great pleasure to release its SKIPIO range.

The SKIPIO range includes, bakery cases, open displays, gelato cases, ice cream dipping cabinet, sandwich, glass merchandiser, Spec Series fridge, freezer and under counter models.

TURBO AIR has over 20 years' experience in building quality, high end refrigeration products. Our technology and performance is appreciated by the world's leading hotels and finest restaurants.

New SKIPIO releases for 2015 include back bar, roll-in, refrigeration cart, heating cart, pass thru units and ice makers. SKIPIO by Turbo Air is your guarantee of quality and reliability.

SKIPIO

ABOUT COMPANY

RELIABILITY

High Tech, Digitally Controlled System

Uniform temperature throughout the unit for reliable food preservation. System helps to ensure food safety and protects working components. Alarm sounds when the door is left opened. Display lights when the fan is operating or if the system is defrosting.

Five Star Quality Control

All products must pass a rigorous five-point inspection to meet our high quality standards.

DURABILITY

High Quality Stainless Steel Construction

Rust-resistant and easy to clean. Rounded corners to create a safer workplace. Stainless steel shelves (Super Deluxe & Premiere models). Durable, rust-resistant shelf clips. Concealed interior lighting. Foam insulated the full height to compressor area. Over-sized refrigeration system.

ERGONOMICS & CONVENIENCE

Wide Range Recessed Door Handle

Our uniquely equipped 16 in. sturdy door handle enables the operator to clasp the handle easily. Additionally, our door handles provide for effortless opening with a less than 7oz. pressure release system. This will help reduce workplace fatigue.

Bottom mount compressor

The bottom-mount compressor is designed to prevent the need and discomfort of reaching and bending to lower areas, in addition to providing for energy efficiency.

ENVIRONMENTAL FRIENDLY

Foamed-in-Place, CFC Free polyurethane, High Density Cell Insulation

Turbo Air has used Cyclopentane as a new blowing agent for polyurethane foam insulation. Cyclopentane does not contain HFCs (hydro-fluorocarbons) and reduces equivalent CO2 emissions significantly. It has zero ODP (ozone depletion potential) and non GWP (global warming potential) resulting in less environmental impact without compromising performance.

OUTSTANDING ENERGY EFFICIENCY

Turbo Air engineers constantly strive to improve energy efficiency without compromising performance. All Turbo Air's glass merchandisers are MEPS (Minimum Energy Performance Standards) approved and many of them are rated as 'High Energy Efficiency' ensuring minimised energy consumption. Turbo Air is the first in the industry to replace a frame heater with a method of using compressor-produced heat which eliminates any unnecessary energy consumption while providing efficient freezing performance.

PRODUCT

REACH - IN

Top mount solid door	2
Top mount glass door	5
Bottom mount solid door	8

UNDER COUNTER

Under counter side prep table	10
Under counter glass door	12
Under counter drawer	13

SALAD / PIZZA TABLE

Salad side prep table - Buffet	16
Salad side prep table - Hood lid	17
Pizza table	18
Pizza table drawer	19

UNDERBAR EQUIPMENT

Back bar	21
Beer dispenser	23

GLASS DOOR MERCHANDISER

SD series	25
Skipio	28

DISPLAY CASE

Sandwich case	30
Bakery case	31
Open case	33

ICE CREAM MERCHANDISER

Gelato show case	36
Ice cream dipping cabinet	37

ICE MAKER

CUSTOMISED PRODUCT

Pass thru	42
Roll in	43
Refrigeration cart	44
Chef base	45
Top mount bun pan	47

PRODUCT FEATURES

Fan cooling
refrigeration
system



Maximized
and convenient
storage



Quality control
international
standard



Evaporators
and condensers



High efficient
compressor



High density
cell insulation



All copper
refrigeration
system



Digitally
controlled
temperature
system



Drain water
evaporation
system



Interior
LED lighting



Self—closing
and
stay open door



Door
connecting
device



Door lock




Ergonomic
design



Call us today **1300 362 596** or visit us at www.turboairaus.com.au


ALPHA
CATERING EQUIPMENT

Cooling performance Analysis Table

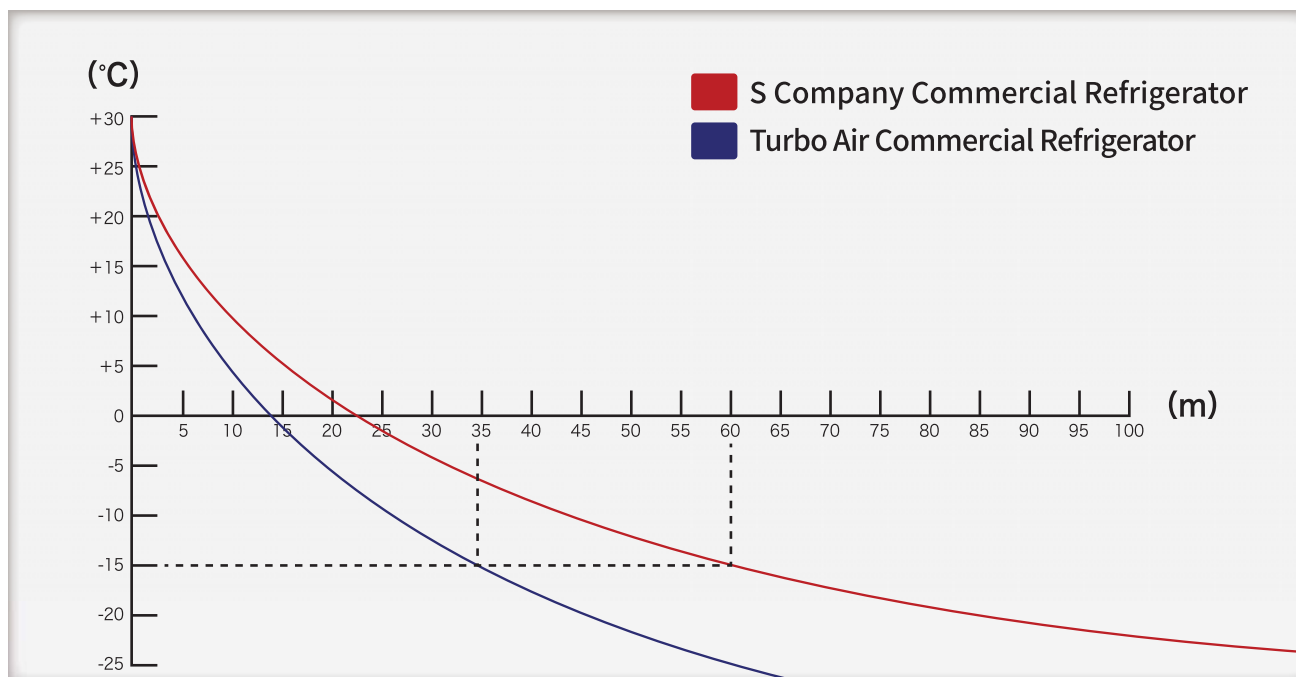

Drain Water Evaporation System

TURBO AIR

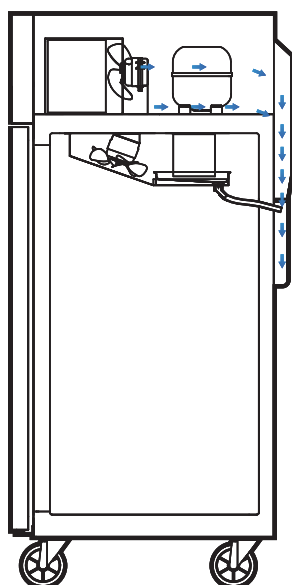


Sanitation

There is no worry of germ being inhaled into refrigerator because no pipe is linked to the ground.

Neatness

It has no influence on outside environment as no drain water will be ejected.

An Ordinary Refrigerator

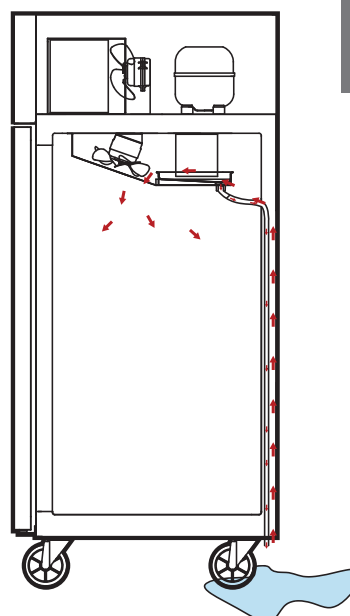

Sanitation

When opening and closing the door, There can be a quite large pressure difference between in and outside the refrigerator which makes germ inhaled into the refrigerator through drain water pipe.

Neatness

Drain water is ejected directly to the outside floor, being not friend to environment.

REFRIGERATOR MANUFACTURER
Turbo air

I REACH - IN



TOP MOUNT SOLID DOOR

REFRIGERATOR / FREEZER / DUAL TEMP

TOP MOUNT GLASS DOOR

REFRIGERATOR / FREEZER

BOTTOM MOUNT SOLID DOOR

REFRIGERATOR / FREEZER

Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT

KR25-1

KF25-1



KR45-2

KF45-2







KR65-3

KF65-3



PLAN VIEW

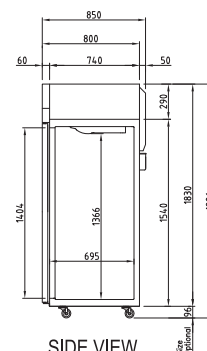

SIDE VIEW

REFRIGERATOR / FREEZER SPEC SHEET

MODEL	KR25-1	KR45-2	KR65-3	KF25-1	KF45-2	KF65-3
Classification	Refrigerator			Freezer		
Cabinet dimension (WxDxH mm)	640x800x1926	1260x800x1926	1900x800x1926	640x800x1926	1260x800x1926	1900x800x1926
Capacity (Liters)	574	1215	1876	574	1215	1876
Inner Temperature	1°C~8°C			-21°C~-12°C		
Ambient Temperature	40°C			38°C		
Doors	1	2	3	1	2	3
# of shelves	3	6	9	3	6	9
Refrigerant	R-134a			R-404a		
Compressor (Hp)	1/4	1/3	3/4	2/3	1	3/4x2
Cooling Type	Fan cooling type					
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free					
Temperature Control Type	Digital					
Amps (A)	2.8	3.5	6	3.5	5.3	8.5
Voltage (V/Hz/Ph)	240V 50Hz 1Ph					
Power (W)	314	366	732	496	774	1346
Weight (Kg)	77	142	167	80	142	167

TOP MOUNT REPRIGERATOR / FREEZER

KR25-2

KF25-2



KR45-4

KF45-4







KR65-6

KF65-6



PLAN VIEW

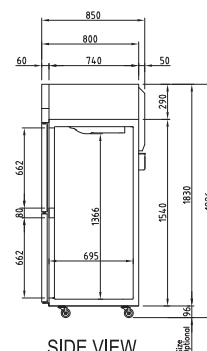

SIDE VIEW

REFRIGERATOR / FREEZER SPEC SHEET

MODEL	KR25-2	KR45-4	KR65-6	KF25-2	KF45-4	KF65-6
Classification	Refrigerator			Freezer		
Cabinet dimension (WxDxH mm)	640x800x1926	1260x800x1926	1900x800x1926	640x800x1926	1260x800x1926	1900x800x1926
Capacity (Liters)	572	1210	1868	572	1210	1868
Inner Temperature	1°C~8°C			-21°C~-12°C		
Ambient Temperature	40°C			38°C		
Doors	2	4	6	2	4	6
# of shelves	3	6	9	3	6	9
Refrigerant	R-134a			R-404a		
Compressor (Hp)	1/4	1/3	3/4	2/3	1	3/4x2
Cooling Type	Fan cooling type					
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free					
Temperature Control Type	Digital					
Amps (A)	2.8	3.5	6	3.5	5.3	8.5
Voltage (V/Hz/Ph)	240V 50Hz 1Ph					
Power (W)	314	366	732	496	774	1346
Weight (Kg)	77	142	167	80	142	167

Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT

TOP MOUNT DUAL TEMP REPRIGERATOR / FREEZER

REFRIGERATOR MANUFACTURER
Turbo air

KRF25-2



KRF45-2

KRF45-4H




KRF65-3

KRF65-6



PLAN VIEW

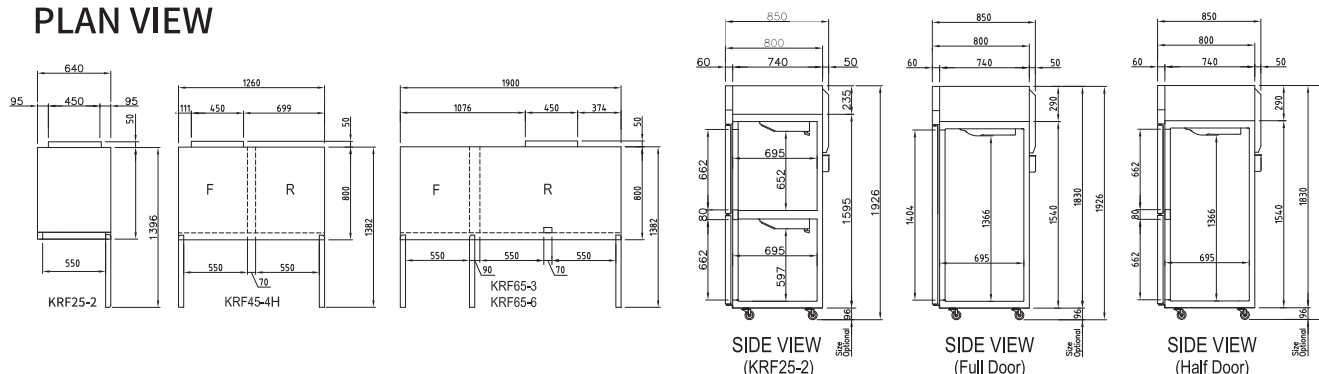

SIDE VIEW
(KRF25-2)

SIDE VIEW
(Full Door)

SIDE VIEW
(Half Door)

REFRIGERATOR / FREEZER SPEC SHEET

MODEL	KRF25-2		KRF45-2 / KRF45-4H		KRF65-3 / KRF65-6	
	Refrigerator	Freezer	Refrigerator	Freezer	Refrigerator	Freezer
Classification	Refrigerator / Freezer					
Cabinet dimension (WxDxH mm)	640x800x1926		1260x800x1926		1900x800x1926	
Capacity (Liters)	242	222	576	576	575	1235
Inner Temperature	1°C~8°C	-21°C~-12°C	1°C~8°C	-21°C~-12°C	1°C~8°C	-21°C~-12°C
Ambient Temperature	38°C					
Doors	2		2 / 4		3 / 6	
# of shelves	1	1	3	3	6	3
Refrigerant	R—134a		R—134a	R—404a	R—134a	R—404a
Compressor (Hp)	1/3		1/3	2/3	1/3	2/3
Cooling Type	Fan cooling type					
Insulation Type	Polyurethan/ Cyclopentane+ CFC Free					
Temperature Control Type	Digital					
Amps (A)	3.5		4.5		5.5	
Voltage (V/Hz/Ph)	240V 50Hz 1Ph					
Power (W)	366		732		732	
Weight (Kg)	85		152		177	

TOP MOUNT GLASS DOOR REFRIGERATOR

KR25-1G

KR45-2G

KR65-3G



REFRIGERATOR SPEC SHEET

MODEL	KR25-1G	KR25-2G	KR45-2G	KR45-4G	KR65-3G	KR65-6G
Classification	Refrigerator					
Cabinet dimension (WxDxH mm)	640x800x1926	640x800x1926	1260x800x1926	1260x800x1926	1900x800x1926	1900x800x1926
Capacity (Liters)	574	572	1215	1210	1876	1868
Inner Temperature	1°C~8°C					
Ambient Temperature	40°C					
Doors	1	2	2	4	3	6
# of shelves	3	3	6	6	9	9
Refrigerant	R-134a					
Compressor (Hp)	1/4	1/4	1/3	1/3	1/3x2	1/3x2
Cooling Type	Fan cooling type					
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free					
Temperature Control Type	Digital					
Amps (A)	2.8	2.8	2.9	3.5	6	6
Voltage (V/Hz/Ph)	240V 50Hz 1Ph					
Power (W)	314	314	366	366	732	732
Weight (Kg)	87	87	152	152	177	177

Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT

KR25-2G





KR45-4G




KR65-6G



PLAN VIEW

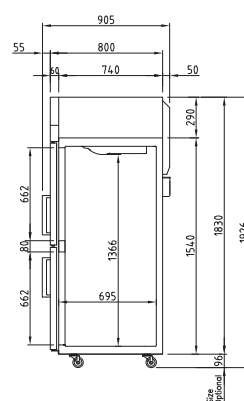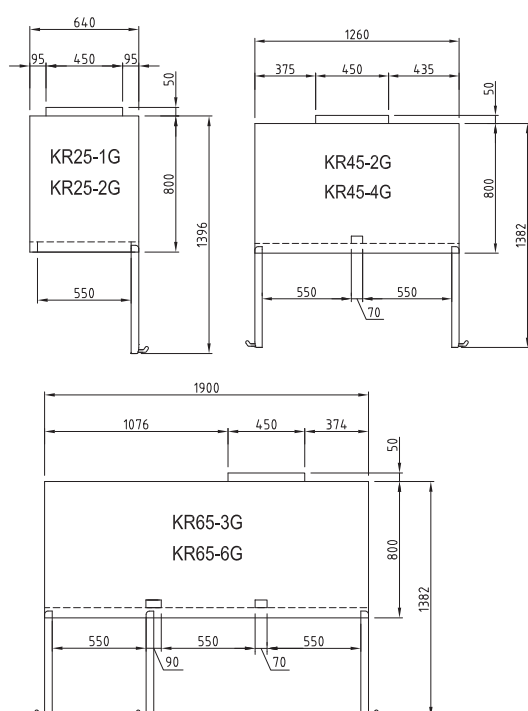

SIDE VIEW
(Half Glass Door)

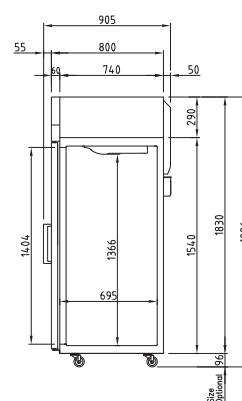

SIDE VIEW
(Glass Door)

TOP MOUNT GLASS DOOR FREEZER

KF25-1G







KF25-2G



KF45-2G



KF45-4G

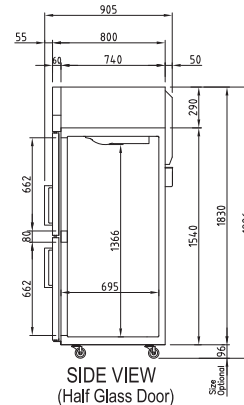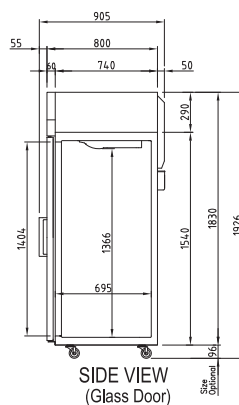

FREEZER SPEC SHEET

MODEL	KF25-1G	KF25-2G	KF45-2G	KF45-4G
Classification	Freezer			
Cabinet dimension (WxDxH mm)	640x800x1926	640x800x1926	1260x800x1926	1260x800x1926
Capacity (Liters)	574	572	1215	1210
Inner Temperature	-21°C~-12°C			
Ambient Temperature	38°C			
Doors	1	2	2	4
# of shelves	3	3	6	6
Refrigerant	R-404a			
Compressor (Hp)	6/7	6/7	2/3x2	2/3x2
Cooling Type	Fan cooling type			
Insulation Type	Polyurethane/Cyclopentane+ CFC Free			
Temperature Control Type	Digital			
Amps (A)	4.5	4.5	8	8
Voltage (V/Hz/Ph)	240V 50Hz 1Ph			
Power (W)	660	660	976	976
Weight (Kg)	95	95	170	170

Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT

BOTTOM MOUNT REPRIGERATOR / FREEZER


REFRIGERATOR MANUFACTURER
Turbo air

SR-23

SF-23




PLAN VIEW

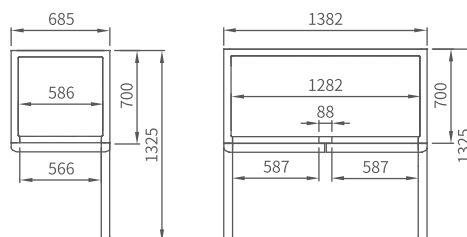

SR-49

SF-49

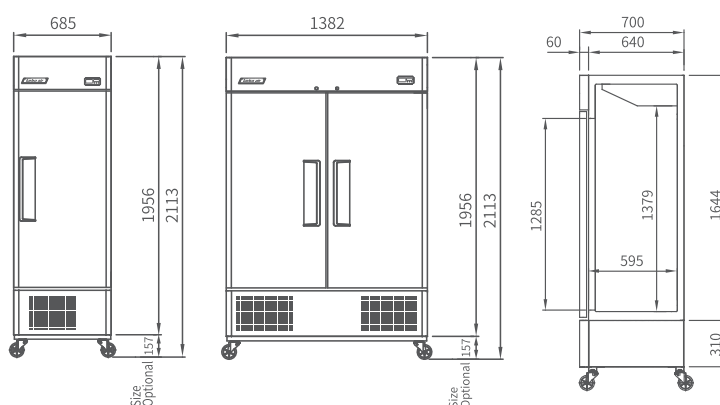

REFRIGERATOR / FREEZER SPEC SHEET

MODEL	SR-23	SR-49	SF-23	SF-49
Classification	Refrigerator		Freezer	
Cabinet dimension (WxDxH mm)	685 X 700 X 2113	1382 X 700 X 2113	685 X 700 X 2113	1382 X 700 X 2113
Capacity (Liters)	522	1148	522	1148
Inner Temperature	1°C~8°C		-21°C~-12°C	
Ambient Temperature	40°C		38°C	
Doors	1	2	1	2
# of shelves	3	6	3	6
Refrigerant	R-134a		R-404a	
Compressor (Hp)	1/4	1/3	1/2	3/4
Cooling Type	Fan cooling type			
Insulation Type	Polyurethane + CFC Free			
Temperature Control Type	Digital			
Amps (A)	2.5	3	4	5
Voltage (V/Hz/Ph)	240V 50Hz 1Ph			
Power (W)	236	297	497	564
Weight (Kg)	120	190	120	190

REFRIGERATOR MANUFACTURER
Turbo air

I UNDER COUNTER

UNDER COUNTER SIDE PREP TABLE

REFRIGERATOR / FREEZER / DUAL TEMP

UNDER COUNTER GLASS DOOR

REFRIGERATOR

UNDER COUNTER - DRAWER

REFRIGERATOR / FREEZER

Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT

UNDER COUNTER SIDE PREP TABLE REFRIGERATOR / FREEZER

REFRIGERATOR MANUFACTURER
Turbo air

KUR9-1 KUF9-1



KUR12-2 KUF12-2



KUR15-2 KUF15-2




KUR18-3 KUF18-3



SUR24-4 SUF24-4



PLAN VIEW


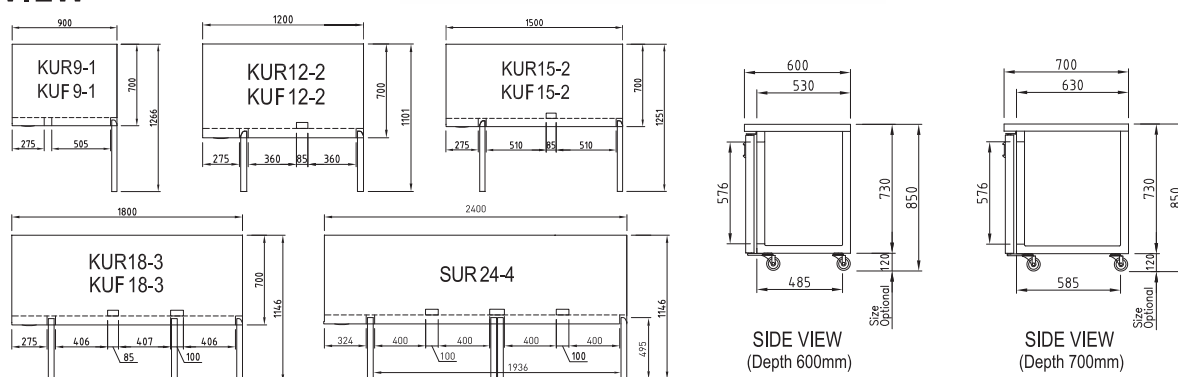


REFRIGERATOR / FREEZER SPEC SHEET

MODEL	KUR9-1 KUF9-1	KUR12-2 KUF12-2	KUR15-2 KUF15-2	KUR18-3 KUF18-3	SUR24-4 SUF24-4
Classification	Refrigerator				
	Freezer				
Cabinet dimension (WxDxH mm)	900x700(600)x850	1200x700(600)x850	1500x700(600)x850	1800x700(600)x850	2400x700x850
Capacity (Liters)	198	311	425	538	600
Inner Temperature	1°C~8°C				
Ambient Temperature	-21°C~-12°C				
Doors	1	2	2	3	4
# of shelves	1	2	2	3	4
Refrigerant	R-134a				
	R-134a	R-404a	R-404a	R-404a	
Compressor (Hp)	1/4	1/4	1/4	1/3	1/3
	1/3	1/3	3/4	3/4	
Cooling Type	Fan cooling type				
Insulation Type	Polyurethane / Cyclopentane + CFC Free				
Temperature Control Type	Digital				
Amps (A)	2.3	2.5	2.5	3	3.2
	2.5	3	4	4.4	
Voltage (V/Hz/Ph)	240V 50Hz 1Ph				
Power (W)	314	314	314	366	440
	366	366	366	613	
Weight (Kg)	72	84	93	109	145


UNDER COUNTER SIDE PREP TABLE REPRIGERATOR / FREEZER

KURF12-2




SIDE VIEW
(Depth 700mm)

KURF15-2



KURF18-3

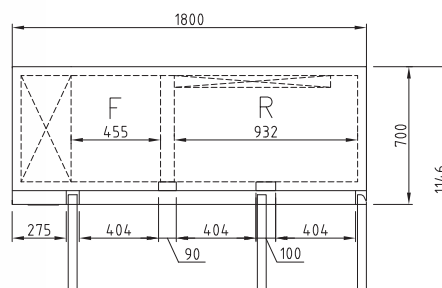

REFRIGERATOR / FREEZER SPEC SHEET

MODEL	KURF12-2		KURF15-2		KURF18-3	
	Refrigerator	Freezer	Refrigerator	Freezer	Refrigerator	Freezer
Classification	Refrigerator / Freezer					
Cabinet dimension (WxDxH mm)	1200x700x850		1500x700x850		1800x700x850	
Capacity (Liters)	121	136	171	191	151	314
Inner Temperature	1°C~8°C	-21°C~-12°C	1°C~8°C	-21°C~-12°C	1°C~8°C	-21°C~-12°C
Ambient Temperature	38°C					
Doors	2		2		3	
# of shelves	1	1	1	1	1	2
Refrigerant	R—134a		R—404a		R—404a	
Compressor (Hp)	1/3		3/4		3/4	
Cooling Type	Fan cooling type					
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free					
Temperature Control Type	Digital					
Amps (A)	3		4.35		4.4	
Voltage (V/Hz/Ph)	240V 50Hz 1Ph					
Power (W)	316		316		366	
Weight (Kg)	92		101		120	



Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT

UNDER COUNTER GLASS DOOR REFRIGERATOR



REFRIGERATOR MANUFACTURER
Turbo air

KGR9-1




SIDE VIEW (Depth 700mm)

KGR12-2




SIDE VIEW (Depth 750mm)

KGR15-2



SIDE VIEW (Depth 750mm)

KGR18-3




REFRIGERATOR SPEC SHEET

MODEL	KGR9-1	KGR12-2	KGR15-2	KGR18-3
Classification	Refrigerator			
Cabinet dimension (WxDxH mm)	900x700(600)x850	1200x700(600)x850	1500x700(600)x850	1800x700(600)x850
Capacity (Liters)	121	309	420	516
Inner Temperature	1°C~8°C			
Ambient Temperature	40°C			
Doors	1	2	2	3
# of shelves	1	2	2	3
Refrigerant	R-134a			
Compressor (Hp)	1/4	1/4	1/4	1/3
Cooling Type	Fan cooling type			
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free			
Temperature Control Type	Digital			
Amps (A)	2.3	2.5	2.5	3.0
Voltage (V/Hz/Ph)	240V 50Hz 1Ph			
Power (W)	314	314	314	366
Weight (Kg)	80	96	110	127

UNDER COUNTER DRAWER REPRIGERATOR / FREEZER


KUR9-3D-3

KUF9-3D-3




KUR12-3D-3

KUF12-3D-3





KUR12-3D-6

KUF12-3D-6



KUR15-3D-3

KUF15-3D-3



SIDE VIEW
(Depth 700mm)

OPTION

2 Drawer Available



REFRIGERATOR / FREEZER SPEC SHEET

MODEL	KUR9-3D-3 KUF9-3D-3	KUR12-3D-3 KUF12-3D-3	KUR12-3D-6 KUF12-3D-6	KUR15-3D-3 KUF15-3D-3
Classification	Refrigerator			
	Freezer			
Cabinet dimension (WxDxH mm)	900x700x850	1200x700x850	1200x700x850	1500x700x850
Capacity (Liters)	198	311	311	425
Inner Temperature	1°C~8°C			
	-21°C~-12°C			
Ambient Temperature	38°C			
Doors	0	1	0	1
# of shelves	0	1	0	1
Refrigerant	R-134a			
	R-134a	R-134a	R-134a	R-404a
Compressor (Hp)	1/4	1/4	1/4	1/4
	1/3	1/3	1/3	3/4
Cooling Type	Fan cooling type			
Insulation Type	Polyurethane / Cyclopentane + CFC Free			
Temperature Control Type	Digital			
Amps (A)	2.3	2.5	2.5	2.5
	3	3.3	3.3	4.4
Voltage (V/Hz/Ph)	240V 50Hz 1Ph			
Power (W)	314	314	314	314
	366	366	366	366
Weight (Kg)	84	97	106	107

Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT

KUR15-3D-6
KUF15-3D-6





KUR18-3D-3



KUR18-3D-6



KUR18-3D-9

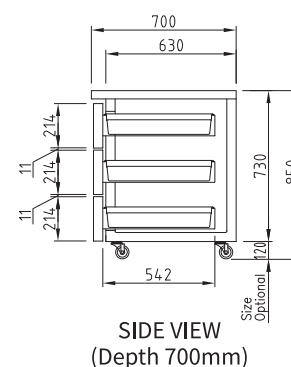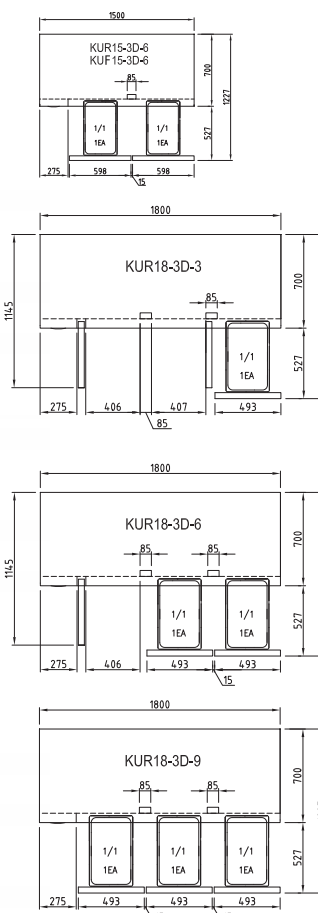

REFRIGERATOR / FREEZER SPEC SHEET

MODEL	KUR15-3D-6 KUF15-3D-6	KUR18-3D-3	KUR18-3D-6	KUR18-3D-9
Classification	Refrigerator			
	Freezer			
Cabinet dimension (WxDxH mm)	1500x700x850	1800x700x850	1800x700x850	1800x700x850
Capacity (Liters)	425	538	538	538
Inner Temperature	1°C~8°C			
	-21°C~-12°C			
Ambient Temperature	38°C			
Doors	0	2	1	0
# of shelves	0	2	1	0
Refrigerant	R-134a			
	R-404a			
Compressor (Hp)	1/4 3/4	1/3	1/3	1/3
Cooling Type	Fan cooling type			
Insulation Type	Polyurethane / Cyclopentane + CFC Free			
Temperature Control Type	Digital			
Amps (A)	2.5 4.4	3	3	3
Voltage (V/Hz/Ph)	240V 50Hz 1Ph			
Power (W)	314 366	366	366	366
Weight (Kg)	116	126	135	144

REFRIGERATOR MANUFACTURER
Turbo air

I **SALAD / PIZZA TABLE**



SALAD SIDE PREP TABLE

BUFFET / HOOD LID

PIZZA TABLE

DOOR / DRAWER


Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT


SALAD SIDE PREP TABLE BUFFET REPRIGERATOR

REFRIGERATOR MANUFACTURER
Turbo air


KSR9-1





KSR12-2




KSR15-2



KSR18-3

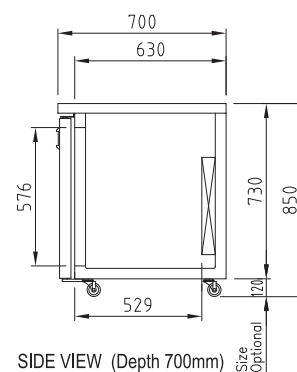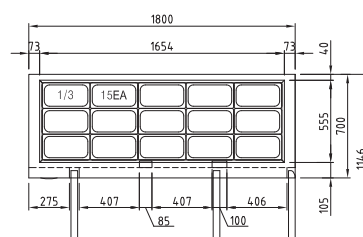

SIDE VIEW (Depth 700mm)

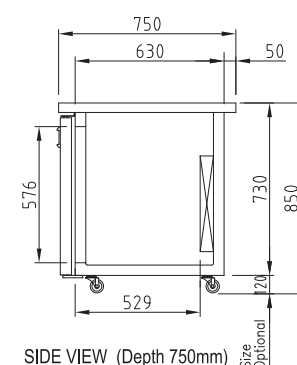

SIDE VIEW (Depth 750mm)



Pans Not Included

REFRIGERATOR SPEC SHEET

MODEL	KSR9-1	KSR12-2	KSR15-2	KSR18-3
Classification	Refrigerator			
Cabinet dimension (WxDxH mm)	900x700x850	1200x700x850	1500x700x850	1800x700x850
Capacity (Liters)	213	309	420	516
Inner Temperature	1°C~8°C			
Ambient Temperature	40°C			
Doors	1	2	2	3
# of shelves	1	2	2	3
Refrigerant	R-134a			
Compressor (Hp)	1/4	1/4	1/4	1/3
Cooling Type	Fan cooling type			
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free			
Temperature Control Type	Digital			
Amps (A)	2.3	2.5	2.5	3.0
Voltage (V/Hz/Ph)	240V 50Hz 1Ph			
Power (W)	314	314	314	366
Weight (Kg)	70	82	91	107



SALAD SIDE PREP TABLE HOOD LID REPRIGERATOR

KHR9-1

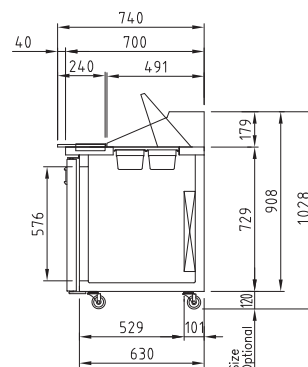


SIDE VIEW (Depth 700mm)

KHR12-2

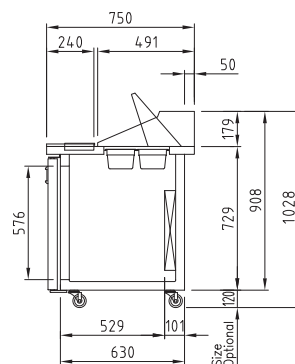


SIDE VIEW (Depth 750mm)

KHR15-2



KHR18-3

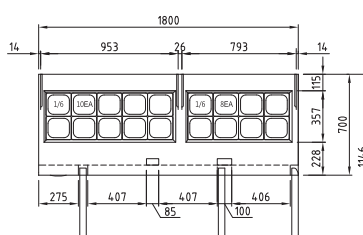

REFRIGERATOR SPEC SHEET

MODEL	KHR9-1	KHR12-2	KHR15-2	KHR18-3
Classification	Refrigerator			
Cabinet dimension (WxDxH mm)	900x700x1028	1200x700x1028	1500x700x1028	1800x700x1028
Capacity (Liters)	213	309	420	516
Inner Temperature	1°C~8°C			
Ambient Temperature	40°C			
Doors	1	2	2	3
# of shelves	1	2	2	3
Refrigerant	R-134a			
Compressor (Hp)	1/4	1/4	1/4	1/3
Cooling Type	Fan cooling type			
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free			
Temperature Control Type	Digital			
Amps (A)	2.3	2.5	2.5	3.0
Voltage (V/Hz/Ph)	240V 50Hz 1Ph			
Power (W)	314	314	314	366
Weight (Kg)	75	89	100	120


Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT

PIZZA TABLE REFRIGERATOR


REFRIGERATOR MANUFACTURER
Turbo air

CTPR-44SD




SIDE VIEW

CTPR-67SD

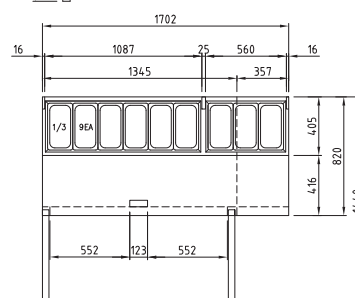

CTPR-93SD

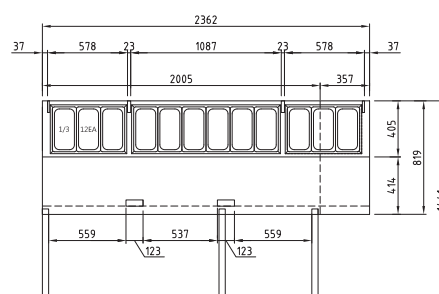

REFRIGERATOR SPEC SHEET

MODEL	CTPR-44SD	CTPR-67SD	CTPR-93SD
Classification	Refrigerator		
Cabinet dimension (WxDxH mm)	1117x820x1069	1702x820x1069	2362x820x1069
Capacity (Liters)	396	566	878
Inner Temperature	1°C~8°C		
Ambient Temperature	40°C		
Doors	1	2	3
# of shelves	2	4	6
# of Pans	6	9	12
# of Hood	1	2	3
Refrigerant	R-134a	R-134a	R-404a
Compressor (Hp)	1/3	7/8	3/4
Cooling Type	Fan cooling type		
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free		
Temperature Control Type	Thermostat		
Amps (A)	3.2	6.0	7.0
Voltage (V/Hz/Ph)	240V 50Hz 1Ph		
Power (W)	366	560	660
Weight (Kg)	140	187	262

PIZZA TABLE DRAWER REFRIGERATOR

CTPR-44SD-D2







CTPR-67SD-D2



CTPR-67SD-D4



PLAN VIEW

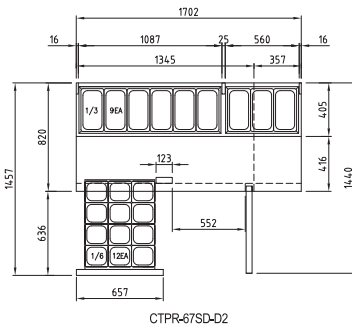

REFRIGERATOR SPEC SHEET

MODEL	CTPR-44-D2	CTPR-67-D2	CTPR-67-D4
Classification	Refrigerator		
Cabinet dimension (WxDxH mm)	1117x820x1069	1702x820x1069	1702x820x1069
Capacity (Liters)	396	566	566
Inner Temperature	1°C~8°C		
Ambient Temperature	40°C		
Doors	0	1	0
Drawers	2	2	4
# of shelves	2	2	4
# of Pans	6	9	9
# of Hood	1	2	2
Refrigerant	R-134a		
Compressor (Hp)	1/3	7/8	7/8
Cooling Type	Fan cooling type		
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free		
Temperature Control Type	Thermostat		
Amps (A)	3.2	6.0	6.0
Voltage (V/Hz/Ph)	240V 50Hz 1Ph		
Power (W)	366	660	660
Weight (Kg)	146	255	260

Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT

REFRIGERATOR MANUFACTURER
Turbo air

I UNDERBAR EQUIPMENT



BACK BAR SERIES

BEER DISPENSER

ALPHA
CATERING EQUIPMENT

Call us today 1300 362 596 or visit us at www.turboairaus.com.au

BACK BAR SERIES

TB6-1G



BLACK



SUS

TB9-2G



BLACK



SUS


TB13-3G




BLACK




SUS




PLAN VIEW




TB6-1G



TB9-2G

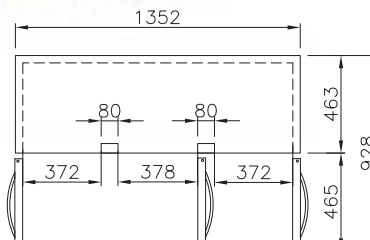

TB13-3G



REFRIGERATOR SPEC SHEET

MODEL	TB6-1G		TB9-2G		TB13-3G	
	900mm	800mm	900mm	800mm	900mm	800mm
Classification	Refrigerator					
Cabinet dimension (WxDxH mm)	660 x 550 x 900	660 x 550 x 800	900 x 550 x 900	900 x 550 x 800	1352 x 550 x 900	1352 x 550 x 800
Capacity (Liters)	125	110	190	165	300	261
Inner Temperature	1°C~8°C					
Ambient Temperature	40°C					
Doors	1	1	2	2	3	3
# of shelves	2	2	4	4	6	6
Refrigerant	R-134a					
Compressor (Hp)	1/4	1/4	1/4	1/4	1/3	1/3
Cooling Type	Fan cooling type					
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free					
Temperature Control Type	Digital					
Amps (A)	2.5	2.5	2.5	2.5	3.5	3.5
Voltage (V/Hz/Ph)	240V 50Hz 1Ph					
Power (W)	190	190	190	190	330	330
Weight (Kg)	60	55	75	70	100	95

Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT


TBB-2SG




TBB-4SG




PLAN VIEW

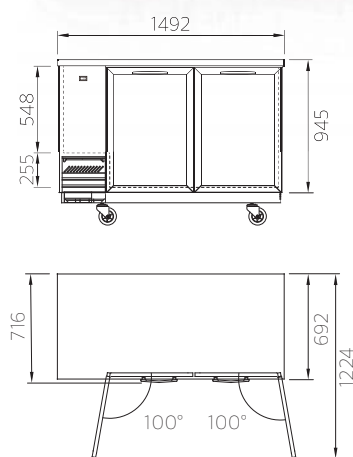

TBB-2SG

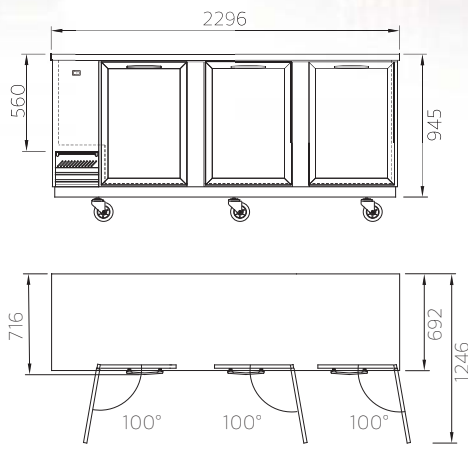

TBB-4SG





SIDE VIEW

REFRIGERATOR SPEC SHEET

MODEL	TBB-2SG	TBB-4SG
Classification	Refrigerator	
Cabinet dimension (WxDxH mm)	1492x692x1065	2296x692x1065
Capacity (Liters)	538	940
Inner Temperature	0°C~8°C	
Ambient Temperature	40°C	
Doors	2	3
# of shelves	6	8
Refrigerant	R-134a	
Compressor (Hp)	1/3	
Cooling Type	Fan cooling type	
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free	
Temperature Control Type	Thermostat	
Amps (A)	1.7	2.0
Voltage (V/Hz/Ph)	240V 50Hz 1Ph	
Power (W)	340	510
Weight (Kg)	140	237



BEER DISPENSER

TBD-1SD




SIDE VIEW
(TBD-1SD)

TBD-2SD




SIDE VIEW
(TBD-2,3,4SD)

TBD-3SD



TBD-4SD



REFRIGERATOR SPEC SHEET

MODEL	TBD-1SD	TBD-2SD	TBD-3SD	TBD-4SD
Classification	Refrigerator			
Cabinet dimension (WxDxH mm)	600x806x995	1492x692x1065	1753x692x1065	2296x692x1065
Capacity (Liters)	212	590	720	850
Inner Temperature	0°C~8°C			
Ambient Temperature	40°C			
Doors	1	2	2	3
# of shelves	1	2	2	3
Refrigerant	R-134a			
Compressor (Hp)	1/8	1/3	1/3	1/3
Cooling Type	Fan cooling type			
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free			
Temperature Control Type	Thermostat			
Amps (A)	1.0	1.7	1.7	2.0
Voltage (V/Hz/Ph)	240V 50Hz 1Ph			
Power (W)	140	210	250	450
Weight (Kg)	79	125	135	191

Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT

REFRIGERATOR MANUFACTURER
Turbo air

I GLASS DOOR MERCHANDISER



ALPHA
CATERING EQUIPMENT

Call us today 1300 362 596 or visit us at www.turboairaus.com.au

MECHANDAISER SD SERIES REPRIGERATOR / FREEZER

TGM-5SD

TGF -5SD

TGM-7SD


TGM-10SD

TGF -10SD


TGM-12SD




PLAN VIEW




TOP VIEW
(TGM-5SD
TGM-7SD)




TOP VIEW
(TGM-10SD
TGM-12SD)




TGM-5SD
TGF-5SD



TGM-7SD



TGM-10SD
TGF-10SD



TGM-12SD

REFRIGERATOR / FREEZER SPEC SHEET

MODEL	TGM-5SD	TGM-7SD	TGM-10SD	TGM-12SD	TGM-15SD	TGM-20SD	TGM-23SD
Classification	Refrigerator						
Cabinet dimension (WxDxH mm)	635x590x831	635x590x1026	655x590x1539	655x590x1759	670x630x2079	685x670x2135	685x770x2135
Capacity (Liters)	167	215	263	320	450	495	597
Inner Temperature	0°C~8°C						
Ambient Temperature	40°C						
Doors	1						
# of shelves	2	3	3	3	4	4	4
Refrigerant	R-134a						
Compressor (Hp)	1/8	1/8	1/5	1/5	1/5	1/5	1/5
Cooling Type	Fan cooling type						
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free						
Temperature Control Type	Thermostat	Thermostat	Digital	Digital	Digital	Digital	Digital
Amps (A)	1.0	1.0	1.4	1.4	1.7	1.7	1.7
Voltage (V/Hz/Ph)	240V 50Hz 1Ph						
Power (W)	210	210	290	290	340	340	340
Weight (Kg)	69	78	99	106	117	122	138

Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT



REFRIGERATOR / FREEZER SPEC SHEET

MODEL	TGM-35SD	TGF-5SD	TGF-10SD	TGF-15SD	TGF-23SD	TGF-35SD
Classification	Refrigerator	Freezer				
Cabinet dimension (WxDxH mm)	1004x809x2136	635x590x831	655x590x1539	670x630x2079	685x770x2135	1004x809x2136
Capacity (Liters)	1048	167	263	450	597	1048
Inner Temperature	0°C~8°C	-24°C~-16°C				
Ambient Temperature	40°C	38°C				
Doors	2	1	1	1	1	2
# of shelves	8	2	3	4	4	8
Refrigerant	R-134a	R-404a				
Compressor (Hp)	1/3	1/3	1/2	1/2	3/4	1+1/4
Cooling Type	Fan cooling type					
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free					
Temperature Control Type	Digital					
Amps (A)	2.6	4.3	4.1	4.8	4.9	7.5
Voltage (V/Hz/Ph)	240V 50Hz 1Ph					
Power (W)	525	710	765	900	1040	1575
Weight (Kg)	174	74	111	131	156	206


MECHANDAISER SD SERIES REPRIGERATOR / FREEZER

TGM-47SD

TGF -47SD




PLAN VIEW

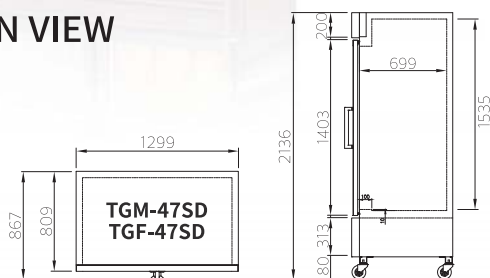

TGM-72SD

TGF -72SD

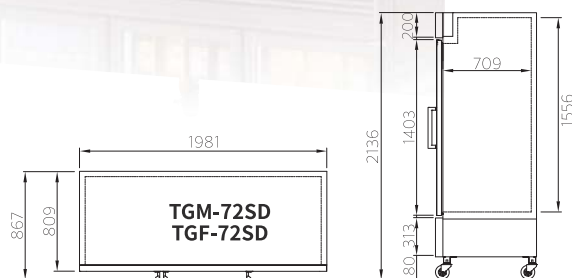

REFRIGERATOR / FREEZER SPEC SHEET

MODEL	TGM-47SD	TGM-72SD	TGF-47SD	TGF-72SD
Classification	Refrigerator		Freezer	
Cabinet dimension (WxDxH mm)	1299x809x2136	1981x809x2136	1299x809x2136	1981x809x2136
Capacity (Liters)	1308	2019	1308	2019
Inner Temperature	0°C~8°C		-24°C~-16°C	
Ambient Temperature	40°C		38°C	
Doors	3		3	
# of shelves	8	12	8	12
Refrigerant	R-134a	R-404a	R-404a	R-404a
Compressor (Hp)	1/3	3/4	1+1/4	3/4x2
Cooling Type	Fan cooling type			
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free			
Temperature Control Type	Digital			
Amps (A)	3.1	4.8	7.9	14.2 (15 amp power plug)
Voltage (V/Hz/Ph)	240V 50Hz 1Ph			
Power (W)	620	955	1665	3060
Weight (Kg)	196	288	232	371




Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT

SPGR25-1

SIFM 25-1

PLAN VIEW

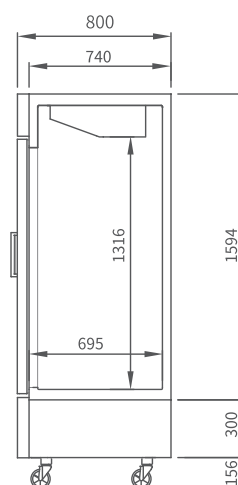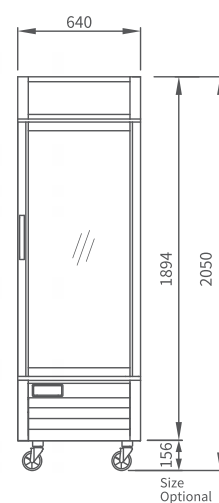

REFRIGERATOR SPEC SHEET

MODEL	SPGR25-1	SIFM25-1
Classification	Refrigerator	Freezer
Cabinet dimension (WxDxH mm)	640x800x2050	640x800x2050
Capacity (Liters)	510	510
Inner Temperature	1°C~8°C	-18°C~-27°C
Ambient Temperature	40°C	38°C
Doors	1	1
# of shelves	4	4
Refrigerant	R-404a	R-404a
Compressor (Hp)	1/4	3/4
Cooling Type	Direct cooling type	Fan cooling type
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free	Polyurethane/ Cyclopentane+ CFC Free
Temperature Control Type	Digital	Digital
Amps (A)	2.8	5
Voltage (V/Hz/Ph)	240V 50Hz 1Ph	240V 50Hz 1Ph
Power (W)	350	682
Weight (Kg)	150	95

REFRIGERATOR MANUFACTURER
Turbo air

I DISPLAY CASE



SANDWICH CASE

BAKERY CASE

OPEN CASE



Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT

TBS-900



TBS-1200




TBS-1500



TBS-1800



PLAN VIEW

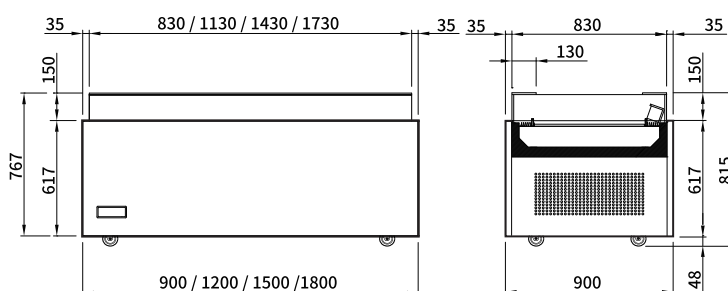

SPEC SHEET

MODEL	TBS-900	TBS-1200	TBS-1500	TBS-1800
Classification	Refrigerator			
Cabinet dimensions (WxDxH mm)	900 / 1200 / 1500 / 1800 x 900 x 815			
Capacity (Liters)	112	150	182	204
Inner Temperature	5°C~10°C			
Ambient Temperature	40°C			
Refrigerant	R-404a			
Cooling Type	Fan cooling type			
Temperature Control Type	Digital			
Insulation Type	Polyurethane / Cyclopentane + CFC Free			
Amps (A)	3.8	4.5	4.9	5.5
Voltage (V/Hz/Ph)	240V 50Hz 1Ph			
Weight (Kg)	140	170	200	230

BAKERY CASE 2Layer

TBD900-2



TBD1200-2



TBD1500-2



TBD1800-2



TBD2100-2



TBD2400-2



SPEC SHEET

MODEL	TBD-900	TBD-1200	TBD-1500	TBD-1800	TBD-2100	TBD-2400
Classification	Refrigerator					
Cabinet dimensions (WxDxH mm)	900 / 1200 / 1500 / 1800 / 2100 / 2400 x 800 x 1100 (2Layer) / 1300 (3Layer) / 1500 (4~5Layer)					
Capacity (Liters)	501	669	837	1005	1173	1336
Inner Temperature	2°C~8°C					
Ambient Temperature	40°C					
Door (GLASS)	Front sliding / Back sliding					
Refrigerant	404A					
LAMP	LED LAMP					
Cooling Type	Fan cooling type					
Temperature Control Type	Digital					
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free					
Amps (A)	3.5	3.8	4	4	5	5.5
Voltage (V/Hz/Ph)	240V 50Hz 1Ph					
Weight (Kg)	190	240	280	300	340	400

Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT

BAKERY CASE 3Layer

REFRIGERATOR MANUFACTURER
Turbo air

TBD900-3



TBD1200-3



TBD1500-3



TBD1800-3




TBD2100-3



TBD2400-3



PLAN VIEW 2Layer

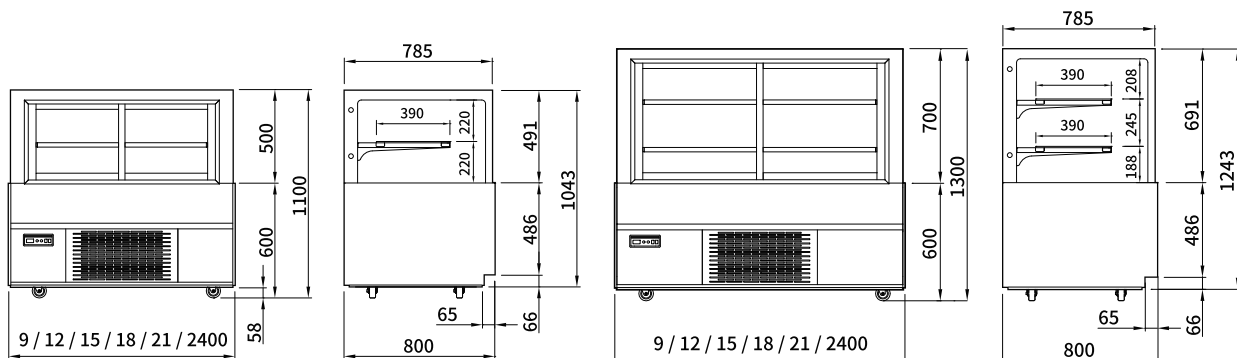

OPEN CASE

TBA-900



TBA-1200




TBA-1500



TBA-1800



PLAN VIEW

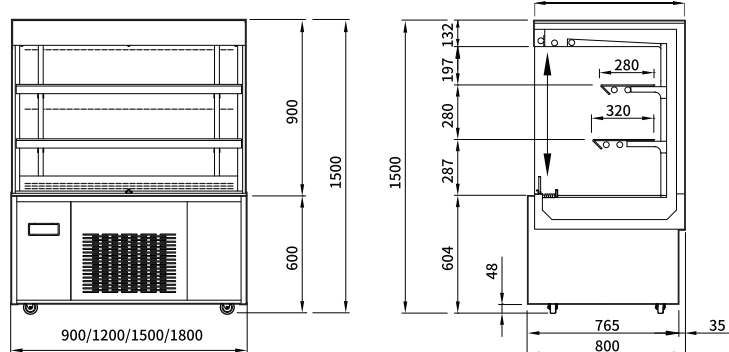

SPEC SHEET

MODEL	TBA-900	TBA-1200	TBA-1500	TBA-1800
Classification	Refrigerator			
Cabinet dimensions (WxDxH mm)	900 / 1200 / 1500 / 1800 x 800 x 1500			
Capacity (Liters)	457	583	709	835
Inner Temperature	5°C~10°C			
Ambient Temperature	40°C			
Refrigerant	R-404a			
Lamp	LED Lamp			
Cooling Type	Fan cooling type			
Temperature Control Type	Digital			
Insulation Type	Polyurethane / Cyclopentane + CFC Free			
Amps (A)	3.8	3.8	3.8	3.8
Voltage (V/Hz/Ph)	240V 50Hz 1Ph			
Weight (Kg)	190	240	270	310


Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT

TOM-40MB



PLAN VIEW

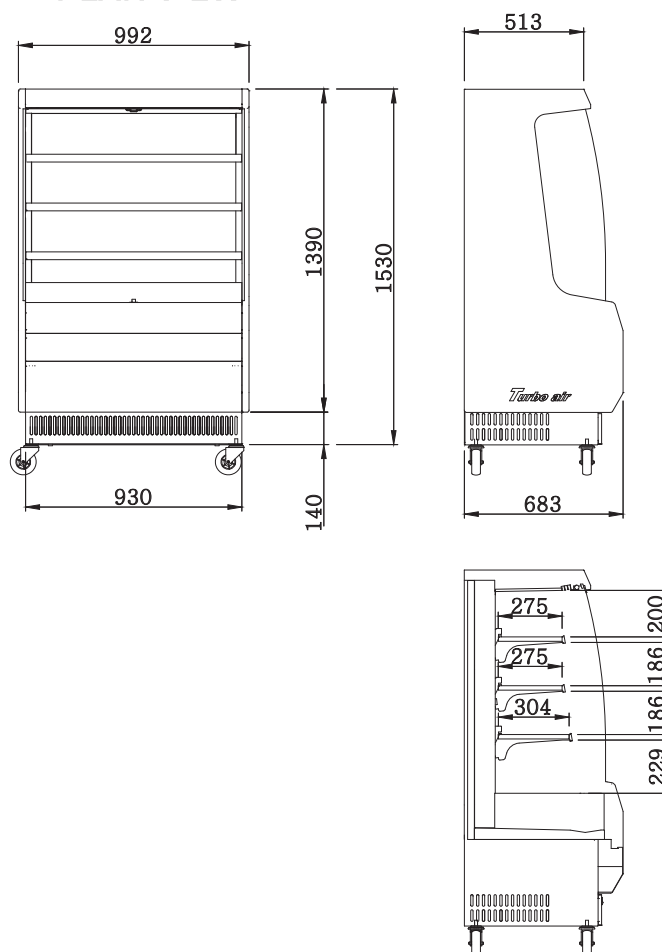

SPEC SHEET

MODEL	TOM-40MB
Classification	Refrigerator
Cabinet dimensions (WxDxH mm)	991 x 711 x 1660
Capacity (Liters)	300
Inner Temperature	2°C~6°C
Ambient Temperature	40°C
Refrigerant	R-404a
Lamp	LED Lamp
Cooling Type	Fan cooling type
Temperature Control Type	Thermostat
Insulation Type	Polyurethane / Cyclopentane + CFC Free
Amps (A)	12 (15 amp power plug)
Voltage (V/Hz/Ph)	240V 50Hz 1Ph
Weight (Kg)	204

REFRIGERATOR MANUFACTURER
Turbo air

I ICE CREAM MERCHANDISER



GELATO SHOW CASE
ICE CREAM DIPPING CABINET

Call us today 1300 362 596 or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT

SIDC-47W





SIDC-70W



SIDC-91W



PLAN VIEW

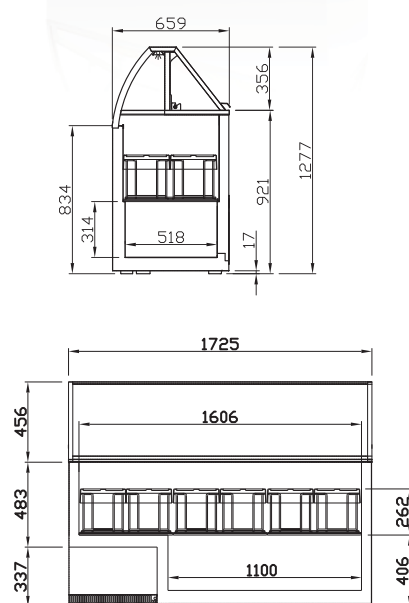

FREEZER SPEC SHEET

MODEL	SIDC-47W	SIDC-70W	SIDC-91W
Classification	Freezer		
Cabinet dimension (WxDxH mm)	1185 x 655 x 1276.5	1720 x 655 x 1276.5	2250 x 655 x 1276.5
Capacity (Liters)	286	607	834
Inner Temperature	-25°C~-15°C		
Ambient Temperature	38°C		
Doors (Acryl / Cabinet)	1	2	2
# of Racks	8	12	16
Refrigerant	R-404a		
Compressor (Hp)	1/2	1	1+
Cooling Type	Direct cooling type		
Insulation Type	Polyurethane/Cyclopentane+ CFC Free		
Temperature Control Type	Digital		
Amps (A)	5	6	6.5
Voltage (V/Hz/Ph)	240V 50Hz 1Ph		
Power (W)	500	804	854
Weight (Kg)	140	170	230

ICE CREAM DIPPING CABINET

TBG-1200F



BLACK



WHITE



SUS




TBG-1500F



TBG-1800F



PLAN VIEW



FREEZER SPEC SHEET

MODEL	TBG-1200F	TBG-1500F	TBG-1800F
Classification	Freezer		
Cabinet dimension (WxDxH mm)	1200 x 950 x 1204	1500 x 950 x 1204	1800 x 950 x 1204
Capacity (Liters)	1266	1466	1666
Inner Temperature	-25°C~-15°C		
Ambient Temperature	38°C		
Doors	Sliding 2 Door		
Pans	12EA	14EA	16EA
Refrigerant	R-404a		
Compressor (Hp)	1	1.5	1.5
Cooling Type	Fan cooling type		
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free		
Temperature Control Type	Digital		
Amps (A)	9	12 (15 amp power plug)	15 (15 amp power plug)
Voltage (V/Hz/Ph)	240V 50Hz 1Ph		
Power (W)	854	1200	1200
Weight (Kg)	180	260	300

Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT

Turbo air REFRIGERATOR MANUFACTURER




**POWER
ON / OFF**



**STATUS
NOTIFICATION**



**SELF
CLEANING**



**CYCLE & ERROR
MESSAGE**

SKIPIO is a new generation of performance, Intelligence and Convenience


- Faster production with strong components
- Front digital controller for easy control
- Modular type units with self contained ice bin
- Innovative self cleaning function
- Simple exterior with anti corrosion material
- Simple structure for easier maintenance
- Easy access to front air filter for cleaning
- High efficiency of air ventilation for long life time

ICE MAKER

SIM-300A



PLAN VIEW

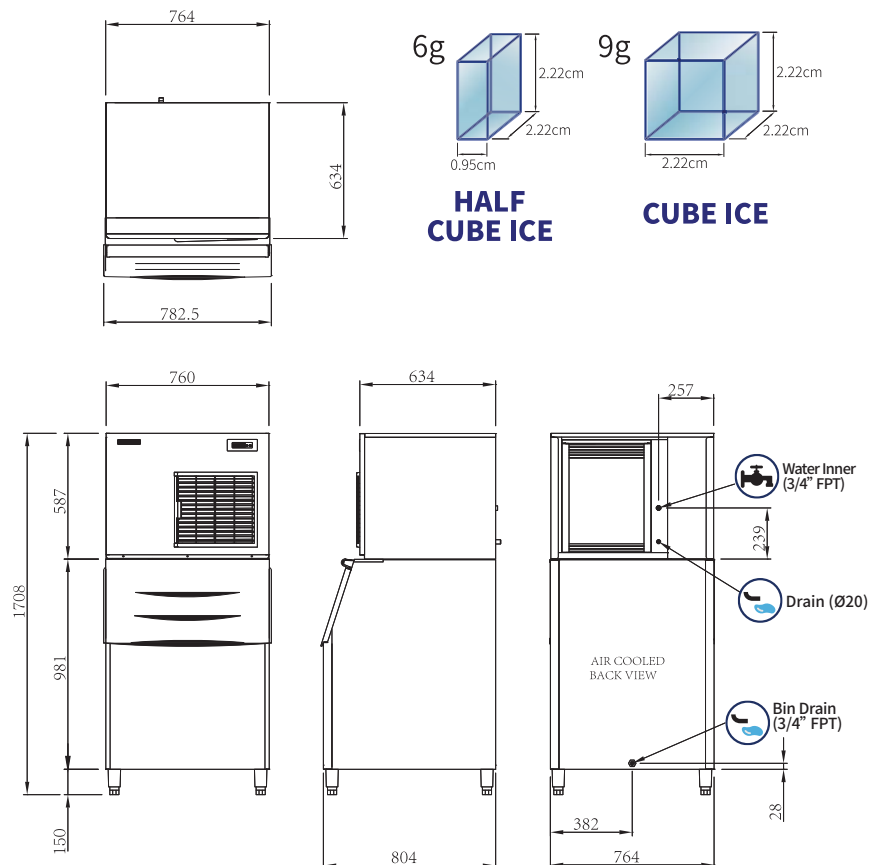

SPEC SHEET

MODEL	SIM-300A	SIM-100A	SIM-40A
Shape of Ice	Medium Cube		
Cabinet dimension (WxDxH mm)	764 x 804 x 1708	660 x 690 x 995	500 x 625 x 795
Approximate Ice Production (Kg / day)	300	100	40
Bin capacity (Kg)	245	64	25
Refrigerant (R-404A)	650g	450g	350g
Compressor (Hp)	1.1/2	1/2	1/4
Cube control type	Air cooled		
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free		
Temperature Control Type	Digital		
Design pressure	Hi 500 / Low 250		
Amps (A)	6	4.0	3.5
Voltage (V/Hz/Ph)	240V 50Hz 1Ph		
Power (W)	1200	580	300
Weight (Kg)	89 (Bin excluded)	65	58



Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT



SIM-100A



PLAN VIEW

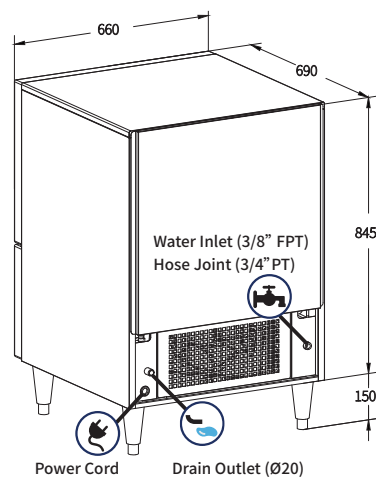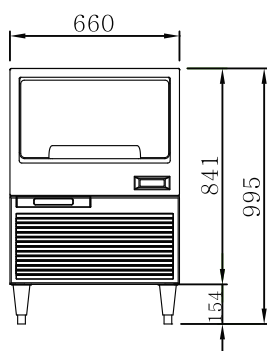

SIM-40A

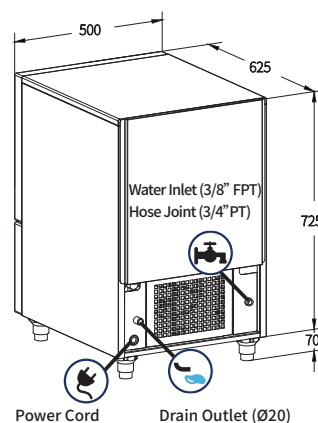

SPEC SHEET

MODEL	ICE WEIGHT	PRODUCT CAPACITY(24h) Temp of Room / Water		ENERGY CONSUMPTION Kwh / 45kg	WATER CONSUMPTION l/h
		21° / 10°C	32° / 20°C		
SIM-40A	9g	50Kg	38Kg	9.12	4
	6g				
SIM-100A	9g	98Kg	80Kg	6.80	6.6
	6g				
SIM-300A	9g	303Kg	277Kg	5.08	19.1
	6g				

REFRIGERATOR MANUFACTURER
Turbo air

I CUSTOMISED PRODUCT



**PASS THRU
ROLL IN
REFRIGERATION CART
CHEF BASE
TOP MOUNT BUN PAN**


Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT

PRO-50R-PT



PLAN VIEW

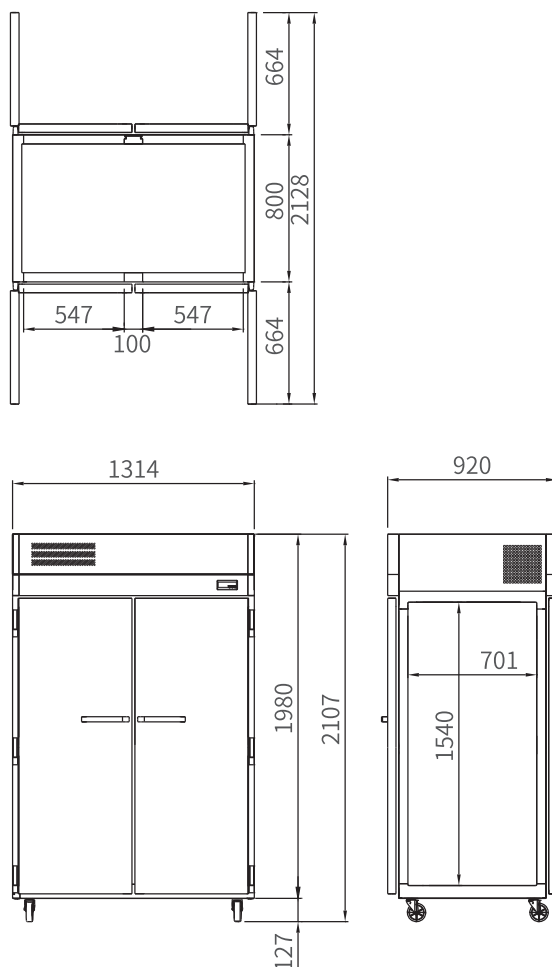




REFRIGERATOR SPEC SHEET

MODEL	PRO-26R-PT	PRO-50R-PT
Classification	Refrigerator	
Cabinet dimension (WxDxH mm)	730 X 920 X 2106	1314 X 920 X 2106
Capacity (Liters)	780	1496
Inner Temperature	1°C~8°C	
Ambient Temperature	40°C	
Door	2	4
# of shelves	3	6
Refrigerant	R-134a	
Compressor (Hp)	1/3	2/3
Cooling Type	Fan cooling type	
Insulation Type	Polyurethane / Cyclopentane + CFC Free	
Temperature Control Type	Digital	
Amps (A)	3	4.8
Voltage (V/Hz/Ph)	240V 50Hz 1Ph	
Power (W)	366	505
Weight (Kg)	155	240

ROLL IN REPRIGERATOR / FREEZER

PRO-26F-RI

PLAN VIEW

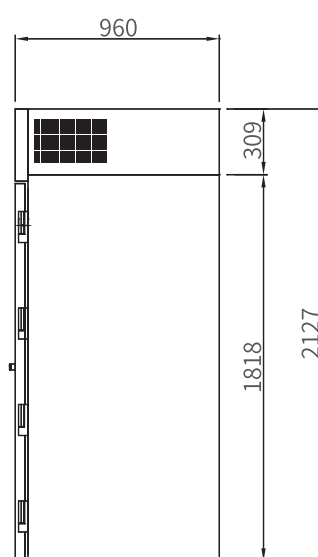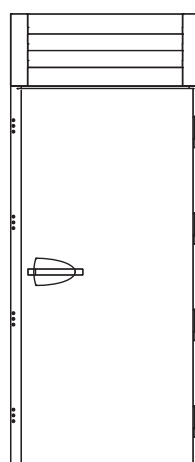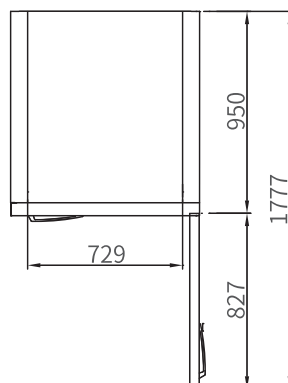

REFRIGERATOR / FREEZER SPEC SHEET

MODEL	PRO-26R-RI	PRO-50R-RI	PRO-26F-RI	PRO-50F-RI
Classification	Refrigerator		Freezer	
Cabinet dimension (WxDxH mm)	889x960x2127		1700x960x2127	
Capacity (Liters)	1186		2440	
Inner Temperature	1°C~8°C		-12°C~-21°C	
Ambient Temperature	40°C		38°C	
Door	1		2	
# of shelves	1		2	
Refrigerant	R-404a			
Compressor (Hp)	1+			
Cooling Type	Fan cooling type			
Insulation Type	Polyurethane / CFC Free			
Temperature Control Type	Digital			
Amps (A)	3	3.5	3	3.5
Voltage (V/Hz/Ph)	240V 60Hz 1Ph			
Power (W)	400	600	500	800
Weight (Kg)	190	290	190	290


Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT

SCR-23D



PLAN VIEW

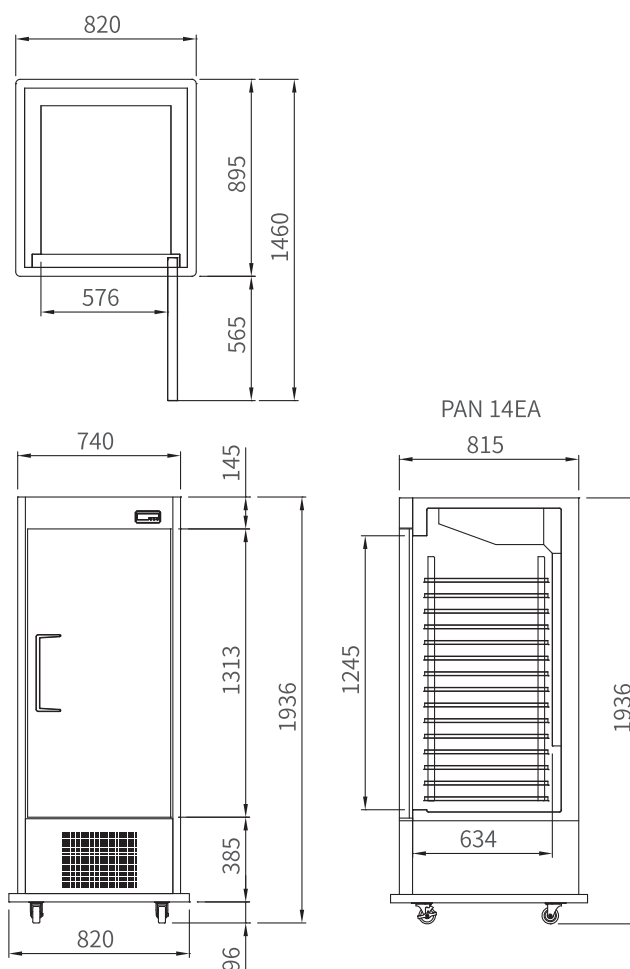


REFRIGERATOR SPEC SHEET


MODEL	SCR-23D
Classification	Refrigerator
Cabinet dimension (WxDxH mm)	820x895x1935.5
Capacity (Liters)	580
Inner Temperature	1°C~8°C
Ambient Temperature	40°C
Door	1
# of shelves	GN GUIDE RH: 14EA / LF: 14EA
Refrigerant	R-134a
Compressor (Hp)	1/3
Cooling Type	Fan cooling type
Insulation Type	Polyurethane / Cyclopentane + CFC Free
Temperature Control Type	Digital
Amps (A)	2.3
Voltage (V/Hz/Ph)	240V 50Hz 1Ph
Power (W)	400
Weight (Kg)	250

CHEF BASE D700


SCB-10-2

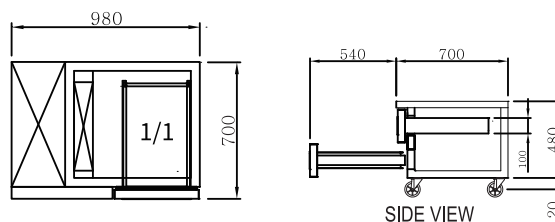

SCB-14-4



SCB-18-6

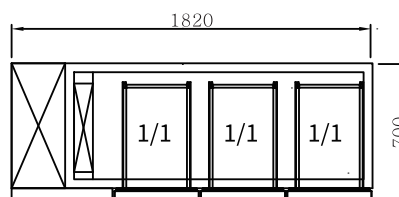

REFRIGERATOR SPEC SHEET

MODEL	SCB-10-2	SCB-14-4	SCB-18-6
Classification	Refrigerator		
Cabinet dimension (WxDxH mm - with castor)	980x700x600	1400x700x600	1820x700x600
Capacity (Liters)	85	176	267
Inner Temperature	1°C~8°C		
Ambient Temperature	40°C		
Drawer	2	4	6
Refrigerant	R-134a		
Compressor (Hp)	1/4	1/3	3/4
Cooling Type	Fan cooling type		
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free		
Temperature Control Type	Digital		
Amps (A)	2.5	2.5	3.2
Voltage (V/Hz/Ph)	240V 50Hz 1Ph		
Power (W)	239	246	257
Weight (Kg)	90	107	137



Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT


CHEF BASE D815

REFRIGERATOR MANUFACTURER
Turbo air


TCBE-52SDR



TCBE-82SDR



TCBE-96SDR

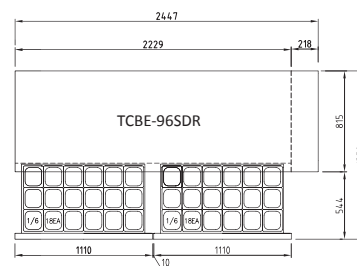

Pans Not Included

REFRIGERATOR SPEC SHEET

MODEL	TCBE-52SDR	TCBE-82SDR	TCBE-96SDR
Classification	Refrigerator		
Cabinet dimension (WxDxH mm)	1328x815x649	2123x815x649	2447x815x649
Capacity (Liters)	311	538	651
Inner Temperature	1°C~8°C		
Ambient Temperature	40°C		
Drawer	2	4	4
Refrigerant	R-134a		
Compressor (Hp)	1/4		
Cooling Type	Fan cooling type		
Insulation Type	Polyurethane/ Cyclopentane+ CFC Free		
Temperature Control Type	Thermostat		
Amps (A)	2.5	3.7	3.7
Voltage (V/Hz/Ph)	240V 50Hz 1Ph		
Power (W)	314	366	366
Weight (Kg)	110	186	219


TOP MOUNT BUN PAN REPRIGERATOR / FREEZER

PLAN VIEW

SBP-1700R

SBP-1700F

SBP-1700RF

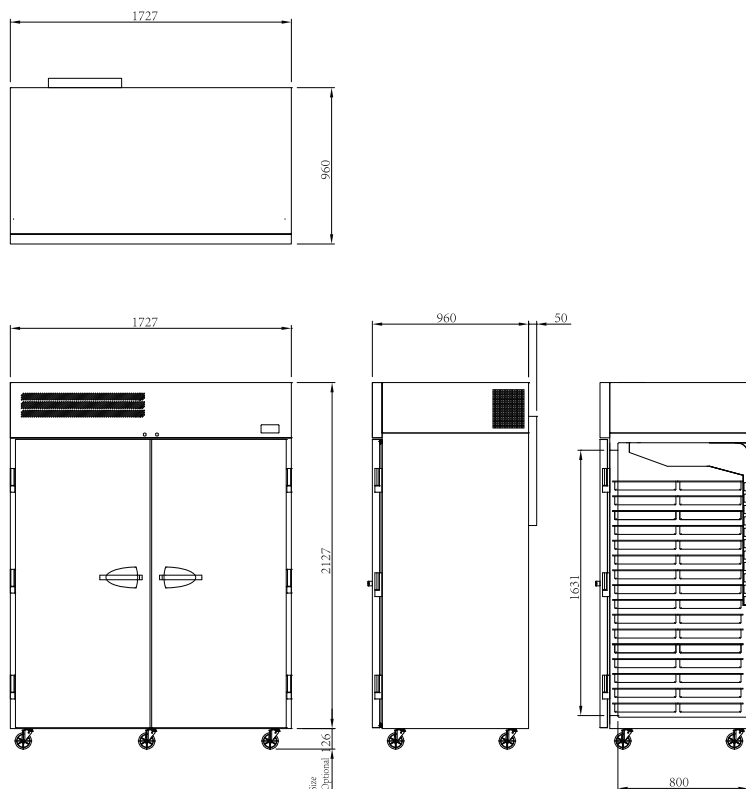

REFRIGERATOR / FREEZER SPEC SHEET

MODEL	SBP-1700R	SBP-1700F	SBP-1700RF
Classification	Refrigerator	Freezer	Freezer/Refrigerator
Cabinet dimension (WxDxH mm)	1727 X 960(50) X 2253		
Capacity (Liters)	1530		
Inner Temperature	1°C~8°C	-21°C ~ -12°C	-21°C ~ -12°C / 1°C~8°C
Ambient Temperature	40°C	38°C	38°C
Door	1	2	2
# of shelves	3	3	6
Refrigerant	R-134a	R-404a	R-134a / R-404a
Compressor (Hp)	2/3	1	2/3 - 1
Cooling Type	Fan cooling type		
Insulation Type	Polyurethane / Cyclopentane + CFC Free		
Temperature Control Type	Digital		
Amps (A)	4.8	6.8	8
Voltage (V/Hz/Ph)	240V 50Hz 1Ph		
Power (W)	505	731	1050
Weight (Kg)	77	77	142

Call us today **1300 362 596** or visit us at www.turboairaus.com.au

ALPHA
CATERING EQUIPMENT

OUR CLIENTS

REFRIGERATOR MANUFACTURER
Turbo air

FRANCHISE



HOTEL



ALPHA
CATERING EQUIPMENT

Call us today **1300 362 596** or visit us at www.turboairaus.com.au

REFRIGERATOR MANUFACTURER
Turbo air

Alpha Catering Equipment (Head office, Showroom)

Add: 2060-2062 Castlereagh Rd Penrith NSW 2750

Web: www.alphacateringequipment.com.au

Web: www.turboairaus.com.au

Tel: 1300 362 596

Fax: 02 4731 2099

SKIPIO

